


Standoff Kit

The SolaRack® Standoff kit is designed to be installed on rolled composite roofs. This system has been listed by UL 2703 for Grounding & Bonding, UL 1703 Class A Type 1,2 and Design Load Rating in Accordance with UL 2703. Installation of the SolaRack® Standoff kit doesn't require any modification to existing roofing materials and will provide a watertight seal when installed according to SolaRack's® Installation Manual.


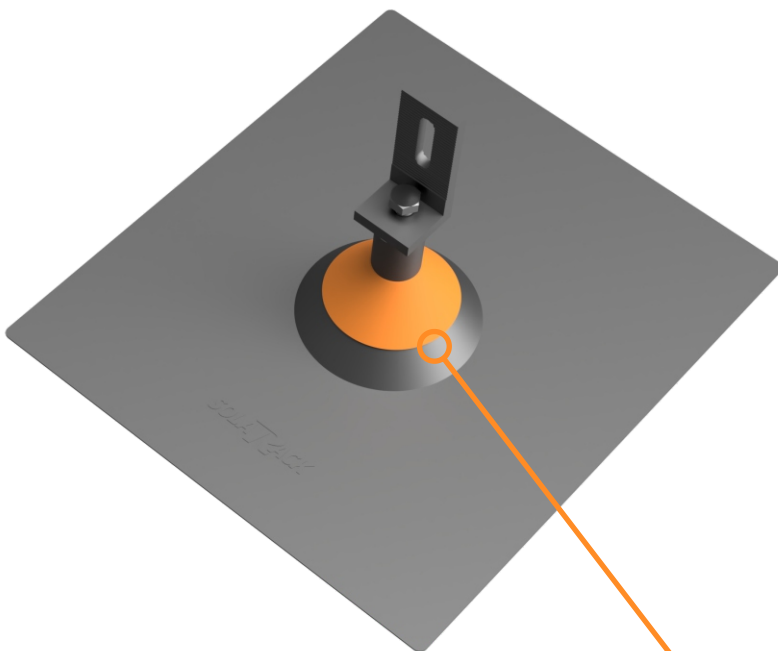


Tilt

Need to tilt your array? Replace the SolaRack L-Foot with SolaRack Front Tilt. You can achieve a 17° tilt in landscape when installing a 3" in front and 9" at the back with the Front Tilt Kit.

Various Stanchion Length

SolaRack offers 4 different stanchion length: 3", 4.5", 6" & 9". Sold in both Clear or Black Anodized

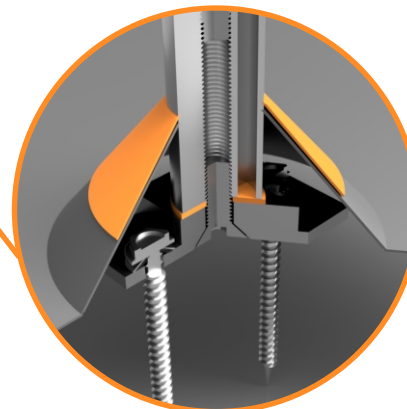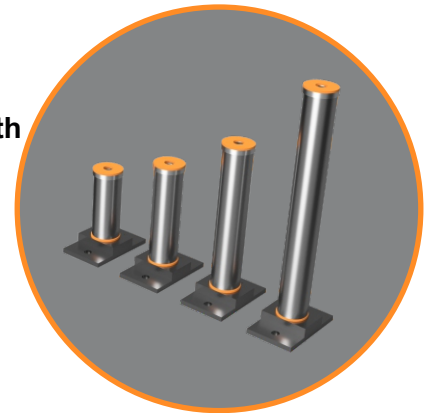

SolaRack® Waterproofing

When it comes to waterproofing we don't cut corners. Our system is designed with many layers of protection. First layer is our round silicon washer on top of the base followed by our large flashing and a UV Rated Silicon Cone. Our flashing is designed with an 4" overlap as required by roofers if you wish to apply rolled comp on top of the flashing.

SolaRack Inc.

1103 Lawrence Dr. Unit A
Newbury Park CA 91320
W: www.solarackusa.com
E: info@solarackusa.com
P: 1.844.686.rack (7225)